


ISDS210A(B) User Guide

InstruStar Electronic Technology

2019-02-25

contents

| | |
|--|----------|
| 1.Introduction..... | 1 |
| 2.Feature Description..... | 1 |
| 3.Software Installation..... | 2 |
| 4.Interface..... | 3 |
| 5.Oscilloscope / Spectrum Analyzer/DDS..... | 4 |

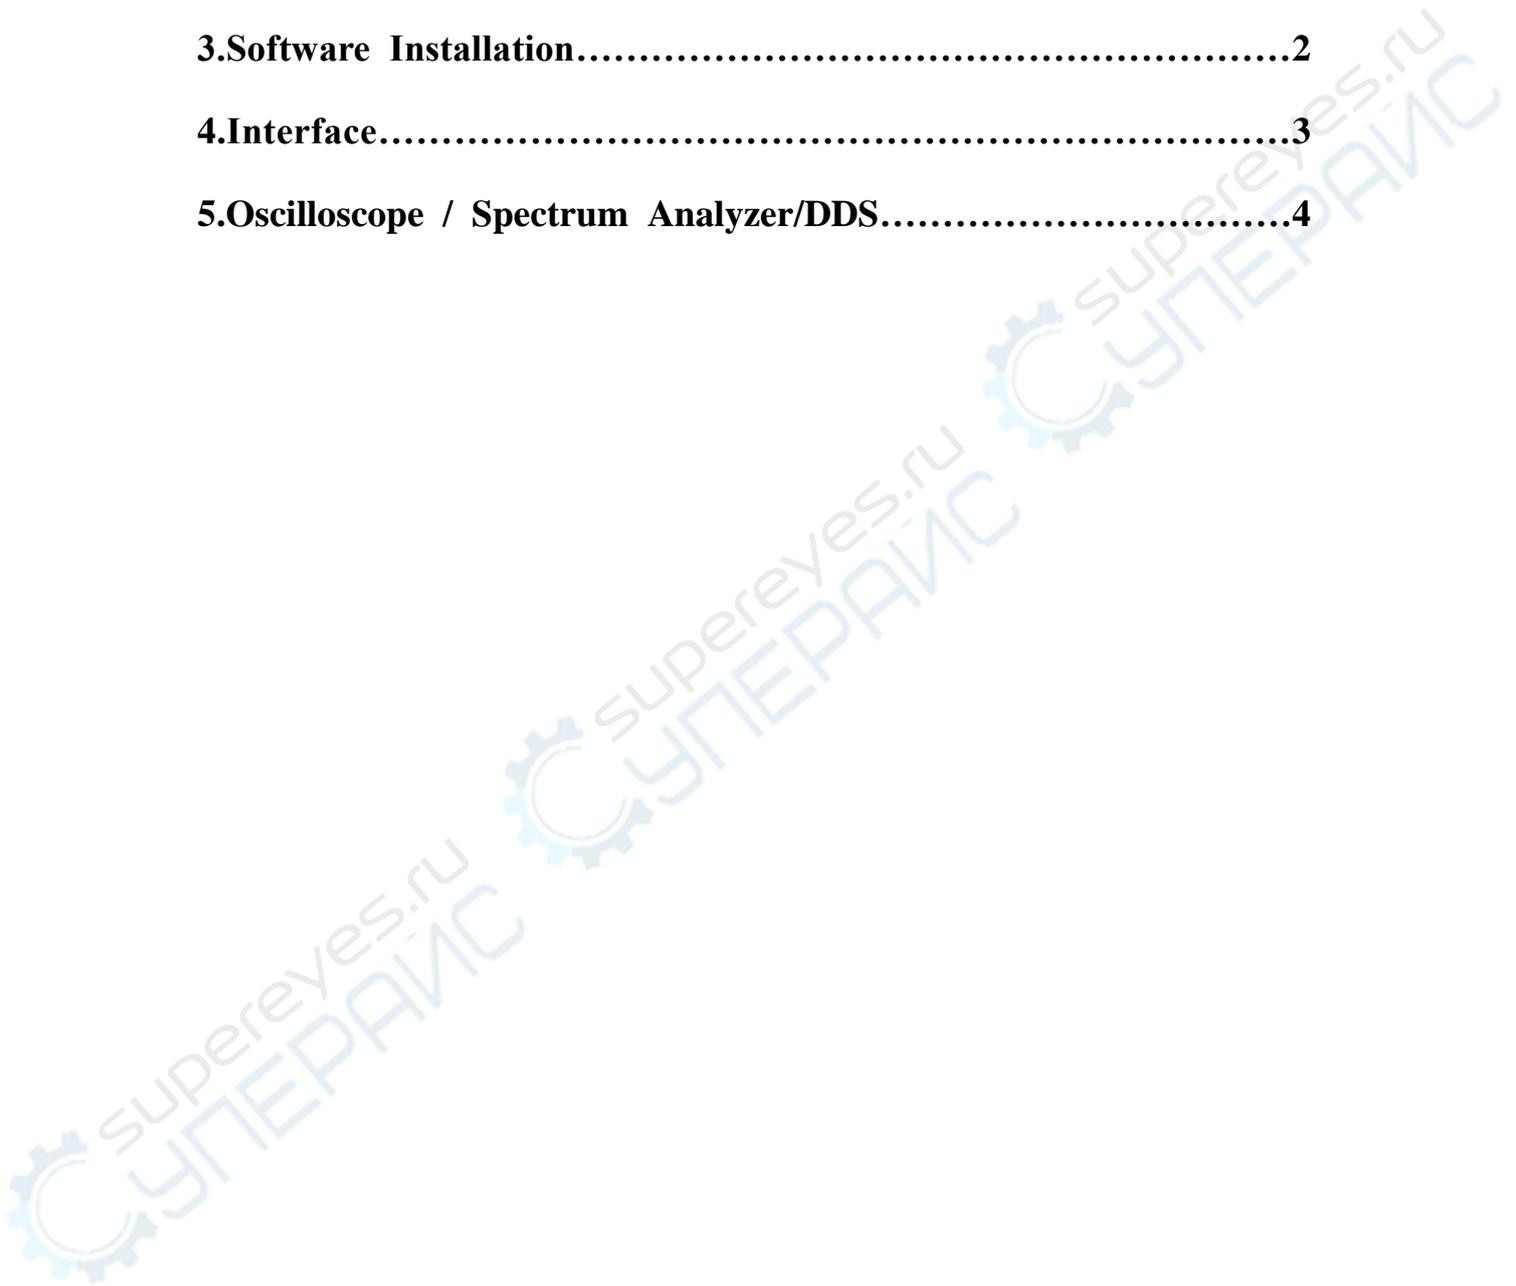

PC SYSTEM REQUIREMENTS

- Windows XP, Win7, Win8, Win10
- Pentium or higher processor
- USB2.0 High speed port.
- 512MB RAM
- 1GB hard disk space



1.Introduction

ISDS210A/ISDS210B dual-channel digital oscilloscope, with "low-cost, high-performance" as the design goals. well-designed bandwidth of 30M, 100M sampling rate, 2 channels, alternating support X-T and X-Y alternating pattern of two-channel virtual oscilloscope, spectrum analyzer. Meanwhile, ISDS210B has DDS function. DDS support 5 kinds of waveform output, Sine wave can output up to 20M. The device communicate with the PC via high speed USB2.0.

| | Oscilloscope | Spectrum Analyzer | DDS | Sweeper |
|----------|--------------|-------------------|-----|---------|
| ISDS210A | √ | √ | | |
| ISDS210B | √ | √ | √ | √ |

2.Feature Description

| Digital Oscilloscope | |
|----------------------|---|
| Channels | 2 |
| Impedance | 1MΩ 25pF |
| Coupling | AC/DC |
| Vertical Resolution | 8Bit |
| Gain Range | -16V ~ 16V (probe X1) -160V ~ 160V (probe X10) |
| Vertical Accuracy | ±3% |
| Time Base Range | 10ns/div-10s/div |
| Input Protection | Diode, 50Vpk |
| Auto Set | Yes(10Hz to 40MHz) |
| Trigger Mode | Auto、 Normal and Signal |
| Trigger Type | No, Edge, Pulse |
| Trigger Level | Yes |
| Trigger Source | CH1, CH2 |
| Buffer Size | 256KB/CH |
| Bandwidth | 30MHz |
| Max Sample | 100MS/s |
| Vertical mode | CH1, CH2, ADD, SUB, MUL |
| Display Mode | X, Y-T 和 X-Y |
| Measurements | Yes |
| Wave Save | Osc(Private)、 Excel and Bmp |

| Spectrum Analyzer | |
|-------------------|--|
| Channels | 2 |
| Bandwidth | 30MHz |
| Algorithm | FFT(18 windows)、correlation |
| FFT Points | 8-1048576/CHN |
| FFT Measure | Harmonic(1-7)、SNR、SINAD、ENOB、THD、SFDR |
| Filter Process | <p>FIR filter supports arbitrary range of frequency sampling method , and Rectangle, bartlett, triangular, cosine, hanning, bartlett_hanning, hamming, blackman, blackman_Harris, tukey, Nuttall, FlatTop, Bohman, Parzen, Lanczos, kaiser, gaussand dolph_chebyshev, window method design.</p> <p>IIR filter support "Butterworth", "Chebyshev I", "Chebyshev II", "Elliptic" type of filter design</p> |

| DDS(Only ISDS210B) | |
|---------------------------------|---|
| Wave | Sine, Square(Duty circle variable),Triangle,Up Sawtooth,Down Sawtooth |
| Amplitude | $\geq 9V_{p-p}$ (no load) |
| Impedance | $200\Omega \pm 10\%$ |
| Offset | $\pm 2.5V$ |
| Frequency Range | 1Hz ~ 20MHz(Sine), 1Hz ~ 2MHz(Others) |
| Frequency Resolution | 1Hz |
| Frequency Steadiness | $\pm 1 \times 10^{-3}$ |
| Frequency Precision | $\pm 5 \times 10^{-3}$ |
| Triangular Wave Linearity | $\geq 98\%$ (1Hz~10kHz) |
| Sine Wave Distortion | $\leq 0.8\%$ (1kHz) |
| Square Wave Rising/Falling Time | $\leq 100ns$ |
| Square Wave Duty Circle | 1%~99% |
| SWEEP | |
| Sweep Range | F _s 到 F _e |
| Sweep Time Range | 0.1 ~10 s |
| Amplitude | 0.5V _{p-p} ~ 10V _{p-p} |

| Sweeper (Only ISDS210B) | |
|-------------------------|-------------|
| Sweep Range | 1Hz~5MHz |
| Sweep Type | Gain, Phase |

Note: The oscilloscope factory calibration, if you are not satisfied with the measurements, can manual calibration, the specific reference oscilloscope


instructions.

3. Software Installation


Please refer to the "Software and Driver Installation.pdf".

4. Interface

4.1 ISDS210A

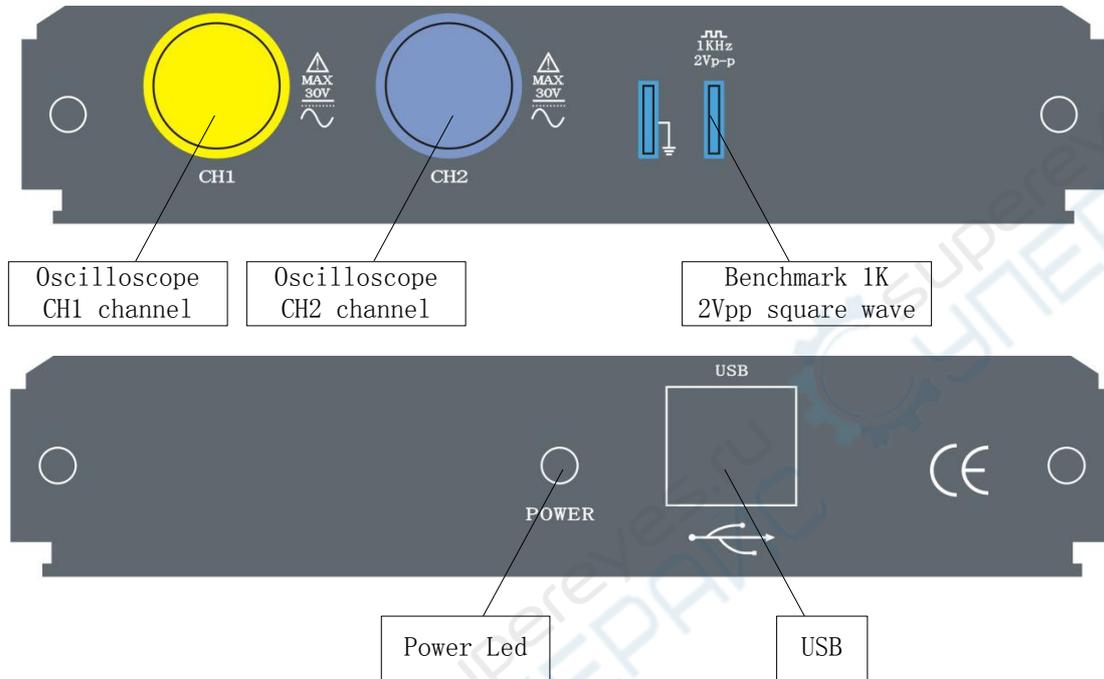

4.2 ISDS210B

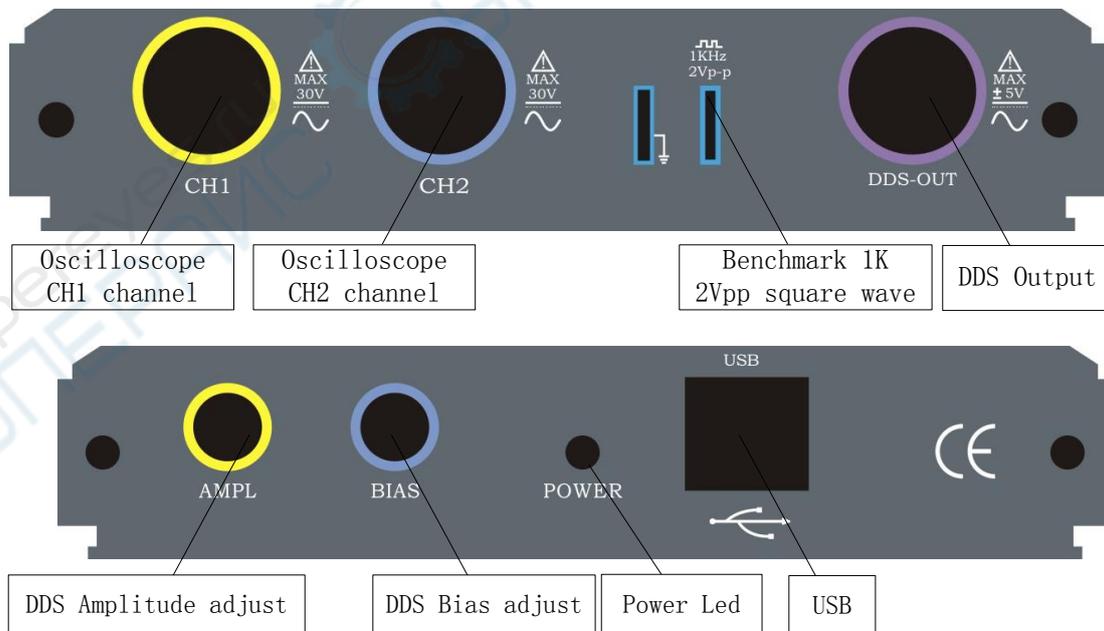

5. Oscilloscope / Spectrum analyzer / DDS

Please refer to the "Multi VirAnalyzer User Guide.pdf", "Digital storage oscilloscope (Professional Version).pdf" and "Digital storage oscilloscope (Simplified Version).pdf".