

DC POWER SUPPLY

USER MANUAL

(NEW 300W)

VER:03

CONTENTS

|                                                   |     |
|---------------------------------------------------|-----|
| SAFETY BRIEF                                      | 1   |
| SAFETY SYMBOL                                     | 1   |
| PRODUCT BRIEF                                     | 2   |
| SPECIFICATION                                     | 3~6 |
| PANEL INSTRUCTION                                 | 7~9 |
| WORK REQUIEMENT                                   | 10  |
| OPERATION INSTRUCTION                             | 10  |
| CONNECT THE LOAD                                  | 11  |
| CONSTANT VOLTAGE/CONSTANT CURRENT CHARACTERISTICS | 11  |
| FUSE REPLACEMENT                                  | 12  |
| PRODUCT MAINTENANCE                               | 13  |
| PRODUCT WARRANTY                                  | 13  |
| PACKING LIST                                      | 13  |

SAFETY BRIEF

This manual contains important safety instructions that must be followed in the operation and storage environment of the SPSS-A/SPSS-B/SPSS-C/SPS-C series. To ensure your personal safety, and ensures that this product works in the best environment, please read this manual carefully before using.

When you get a brand-new power supply, you need to do the necessary checks to make sure the instrument is working properly.

1. To check whether there are damages caused during transportation.
2. To check whether all the accessories are complete.
3. To check whether the output voltage and output current are normal after turning on the device.

If finding out any problems, please contact the merchant immediately.

SAFETY SYMBOL

The safety symbols below will appear in this manual or on the DC power supply.



Attention



High Voltage



Grounding

1

PRODUCT BRIEF

The SPSS-A/SPSS-B/SPSS-C/SPS-C series of adjustable regulated DC power supply designed for use in laboratories, schools and production lines. Both output voltage and output current are continuously adjustable between 0 and nominal.

The stability and ripple factor of the power supply are very good and have a perfect protection circuit. Can work at full load for a long time. This power supply can be used as both a regulated power supply and a regulated current supply.

2

SPECIFICATION

1. Switchable DC regulated power supply

| Model Number                                                               | SPPS-A305/305D                      | SPPS-A3010/3010D | SPPS-A605/605D | SPPS-A1203/1203D | SPPS-A1503/150D |
|----------------------------------------------------------------------------|-------------------------------------|------------------|----------------|------------------|-----------------|
| Output Voltage                                                             | 0~30V                               | 0~30V            | 0~60V          | 0~120V           | 0~150~15V       |
| Output Current                                                             | 0~5A                                | 0~10A            | 0~5A           | 0~3A             | 0~3A0~5A        |
| Input Voltage: 230V±10% 50Hz (115V±10% 60Hz)                               |                                     |                  |                |                  |                 |
| Working Temperature: 0℃~40℃; Relative Humidity: <80%RH                     |                                     |                  |                |                  |                 |
| Storage Temperature: -10℃~70℃; Relative Humidity: <70%RH                   |                                     |                  |                |                  |                 |
| Constant Voltage State: Voltage stability0.1%+3mV Low Voltage:0.2~0.3%+3mV |                                     |                  |                |                  |                 |
| Load stability0.5%+3mV                                                     |                                     |                  |                |                  |                 |
| Ripple noises30mVrms                                                       |                                     |                  |                |                  |                 |
| Constant Current State: Current stability0.2%+3mA                          |                                     |                  |                |                  |                 |
| Load stability0.2%+3mA                                                     |                                     |                  |                |                  |                 |
| Ripple noises20mArms (valid value)                                         |                                     |                  |                |                  |                 |
| Display Accuracy: 0.5%+2digits                                             |                                     |                  |                |                  |                 |
| Display Resolution: Voltage:00.01V Current:0.001A                          |                                     |                  |                |                  |                 |
| Product Dimension: Length 240mm X Width85 X Height155                      |                                     |                  |                |                  |                 |
| Product Weight                                                             | 1.2Kg                               | 1.2Kg            | 1.2Kg          | 1.2Kg            | 1.2Kg           |
| Fuse Standard                                                              | 3A(AC 220V Input)/5A(AC 110V Input) |                  |                |                  |                 |

The above parameters are measured at an ambient temperature of 25 ± 5°C, relative humidity: < 80%RH, and preheated for 30 minutes. The actual parameters will vary slightly.

3

SPECIFICATION

Switchable DC regulated power supply

| Model Number                                                               | SPPS-B305/305D                      | SPPS-B3010/3010D | SPPS-B605/605D | SPPS-B1203/1203D | SPPS-B1503/150D |
|----------------------------------------------------------------------------|-------------------------------------|------------------|----------------|------------------|-----------------|
| Output Voltage                                                             | 0~30V                               | 0~30V            | 0~60V          | 0~120V           | 0~150~15V       |
| Output Current                                                             | 0~5A                                | 0~10A            | 0~5A           | 0~3A             | 0~3A0~5A        |
| Input Voltage: 230V±10% 50Hz (115V±10% 60Hz)                               |                                     |                  |                |                  |                 |
| Working Temperature: 0℃~40℃; Relative Humidity: <80%RH                     |                                     |                  |                |                  |                 |
| Storage Temperature: -10℃~70℃; Relative Humidity: <70%RH                   |                                     |                  |                |                  |                 |
| Constant Voltage State: Voltage stability0.1%+3mV Low Voltage:0.2~0.3%+3mV |                                     |                  |                |                  |                 |
| Load stability0.5%+3mV                                                     |                                     |                  |                |                  |                 |
| Ripple noises30mVrms                                                       |                                     |                  |                |                  |                 |
| Constant Current State: Current stability0.2%+3mA                          |                                     |                  |                |                  |                 |
| Load stability0.2%+3mA                                                     |                                     |                  |                |                  |                 |
| Ripple noises20mArms (valid value)                                         |                                     |                  |                |                  |                 |
| Display Accuracy: 0.5%+2digits                                             |                                     |                  |                |                  |                 |
| Display Resolution: Voltage:00.01V Current:0.001A                          |                                     |                  |                |                  |                 |
| Product Dimension: Length 240mm X Width85 X Height155                      |                                     |                  |                |                  |                 |
| Product Weight                                                             | 1.2Kg                               | 1.2Kg            | 1.2Kg          | 1.2Kg            | 1.2Kg           |
| Fuse Standard                                                              | 3A(AC 220V Input)/5A(AC 110V Input) |                  |                |                  |                 |

The above parameters are measured at an ambient temperature of 25 ± 5°C, relative humidity: < 80%RH, and preheated for 30 minutes. The actual parameters will vary slightly.

4

SPECIFICATION

Switchable DC regulated power supply

| Model Number                                                               | SPPS-C305/305D                      | SPPS-C3010/3010D | SPPS-C605/605D | SPPS-C1203/1203D | SPPS-C1503/150D |
|----------------------------------------------------------------------------|-------------------------------------|------------------|----------------|------------------|-----------------|
| Output Voltage                                                             | 0~30V                               | 0~30V            | 0~60V          | 0~120V           | 0~150~15V       |
| Output Current                                                             | 0~5A                                | 0~10A            | 0~5A           | 0~3A             | 0~3A0~5A        |
| Input Voltage: 230V±10% 50Hz (115V±10% 60Hz)                               |                                     |                  |                |                  |                 |
| Working Temperature: 0℃~40℃; Relative Humidity: <80%RH                     |                                     |                  |                |                  |                 |
| Storage Temperature: -10℃~70℃; Relative Humidity: <70%RH                   |                                     |                  |                |                  |                 |
| Constant Voltage State: Voltage stability0.1%+3mV Low Voltage:0.2~0.3%+3mV |                                     |                  |                |                  |                 |
| Load stability0.5%+3mV                                                     |                                     |                  |                |                  |                 |
| Ripple noises30mVrms                                                       |                                     |                  |                |                  |                 |
| Constant Current State: Current stability0.2%+3mA                          |                                     |                  |                |                  |                 |
| Load stability0.2%+3mA                                                     |                                     |                  |                |                  |                 |
| Ripple noises20mArms (valid value)                                         |                                     |                  |                |                  |                 |
| Display Accuracy: 0.5%+2digits                                             |                                     |                  |                |                  |                 |
| Display Resolution: Voltage:00.01V Current:0.001A                          |                                     |                  |                |                  |                 |
| Product Dimension: Length 240mm X Width85 X Height155                      |                                     |                  |                |                  |                 |
| Product Weight                                                             | 1.2Kg                               | 1.2Kg            | 1.2Kg          | 1.2Kg            | 1.2Kg           |
| Fuse Standard                                                              | 3A(AC 220V Input)/5A(AC 110V Input) |                  |                |                  |                 |

The above parameters are measured at an ambient temperature of 25 ± 5°C, relative humidity: < 80%RH, and preheated for 30 minutes. The actual parameters will vary slightly.

5

SPECIFICATION


Switchable DC regulated power supply

| Model Number                                                               | SPS-C305/305D                       | SPS-C3010/3010D | SPS-C605/605D | SPS-C1203/1203D | SPS-C1503/150D |
|----------------------------------------------------------------------------|-------------------------------------|-----------------|---------------|-----------------|----------------|
| Output Voltage                                                             | 0~30V                               | 0~30V           | 0~60V         | 0~120V          | 0~150~15V      |
| Output Current                                                             | 0~5A                                | 0~10A           | 0~5A          | 0~3A            | 0~3A0~5A       |
| Input Voltage: 230V±10% 50Hz (115V±10% 60Hz)                               |                                     |                 |               |                 |                |
| Working Temperature: 0℃~40℃; Relative Humidity: <80%RH                     |                                     |                 |               |                 |                |
| Storage Temperature: -10℃~70℃; Relative Humidity: <70%RH                   |                                     |                 |               |                 |                |
| Constant Voltage State: Voltage stability0.1%+3mV Low Voltage:0.2~0.3%+3mV |                                     |                 |               |                 |                |
| Load stability0.5%+3mV                                                     |                                     |                 |               |                 |                |
| Ripple noises30mVrms                                                       |                                     |                 |               |                 |                |
| Constant Current State: Current stability0.2%+3mA                          |                                     |                 |               |                 |                |
| Load stability0.2%+3mA                                                     |                                     |                 |               |                 |                |
| Ripple noises20mArms (valid value)                                         |                                     |                 |               |                 |                |
| Display Accuracy: 0.5%+2digits                                             |                                     |                 |               |                 |                |
| Display Resolution: Voltage:00.01V Current:0.001A                          |                                     |                 |               |                 |                |
| Product Dimension: Length 240mm X Width85 X Height155                      |                                     |                 |               |                 |                |
| Product Weight                                                             | 1.2Kg                               | 1.2Kg           | 1.2Kg         | 1.2Kg           | 1.2Kg          |
| Fuse Standard                                                              | 3A(AC 220V Input)/5A(AC 110V Input) |                 |               |                 |                |

The above parameters are measured at an ambient temperature of 25 ± 5°C, relative humidity: < 80%RH, and preheated for 30 minutes. The actual parameters will vary slightly.

6


PANEL INSTRUCTION (SPPS-A series)

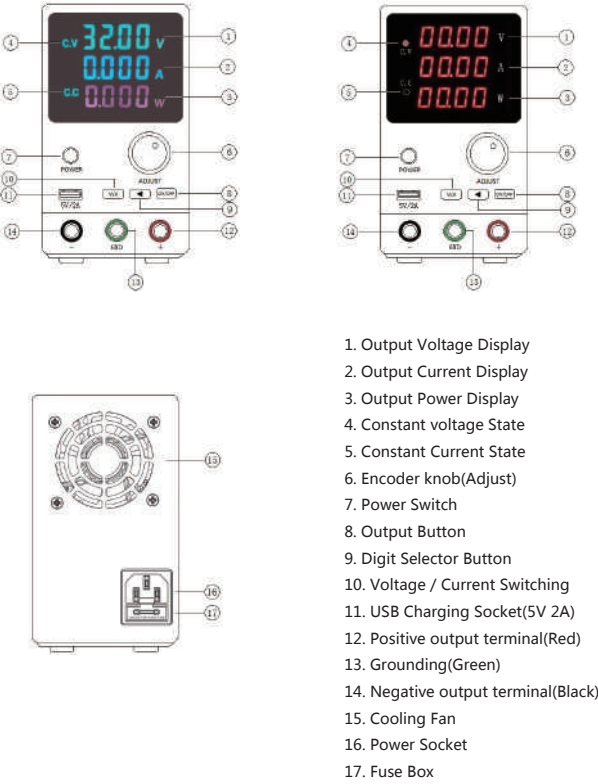

1. Output Voltage Display
2. Output Current Display
3. Output Power Display
4. Constant voltage State
5. Constant Current State
6. Encoder knob(Adjust)
7. Power Switch
8. Output Button
9. Digit Selector Button
10. Voltage / Current Switching
11. USB Charging Socket(5V 2A)
12. Positive output terminal(Red)
13. Grounding(Green)
14. Negative output terminal(Black)
15. Cooling Fan
16. Power Socket
17. Fuse Box

7


PANEL INSTRUCTION (SPPS-B series):

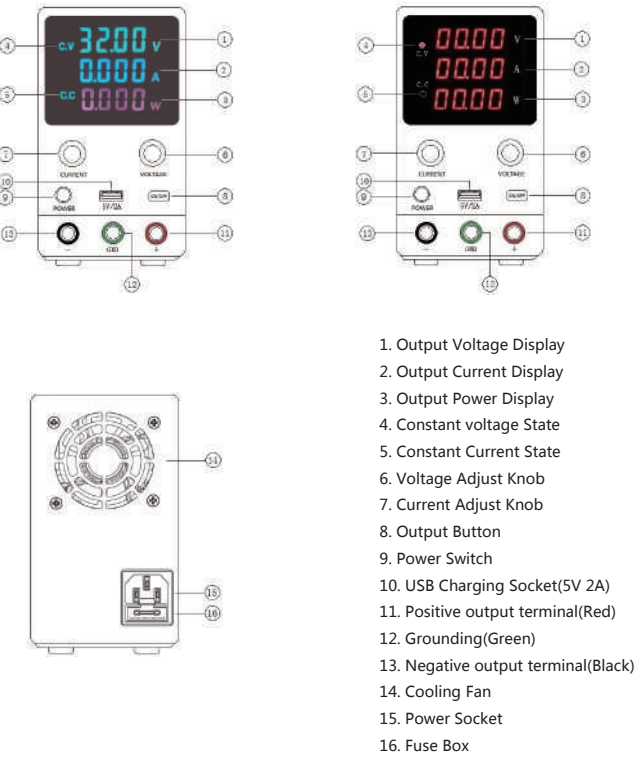

1. Output Voltage Display
2. Output Current Display
3. Output Power Display
4. Constant voltage State
5. Constant Current State
6. Voltage Adjust Knob
7. Current Adjust Knob
8. Output Button
9. Power Switch
10. USB Charging Socket(5V 2A)
11. Positive output terminal(Red)
12. Grounding(Green)
13. Negative output terminal(Black)
14. Cooling Fan
15. Power Socket
16. Fuse Box

8

PANEL INSTRUCTION (SPPS-C series):

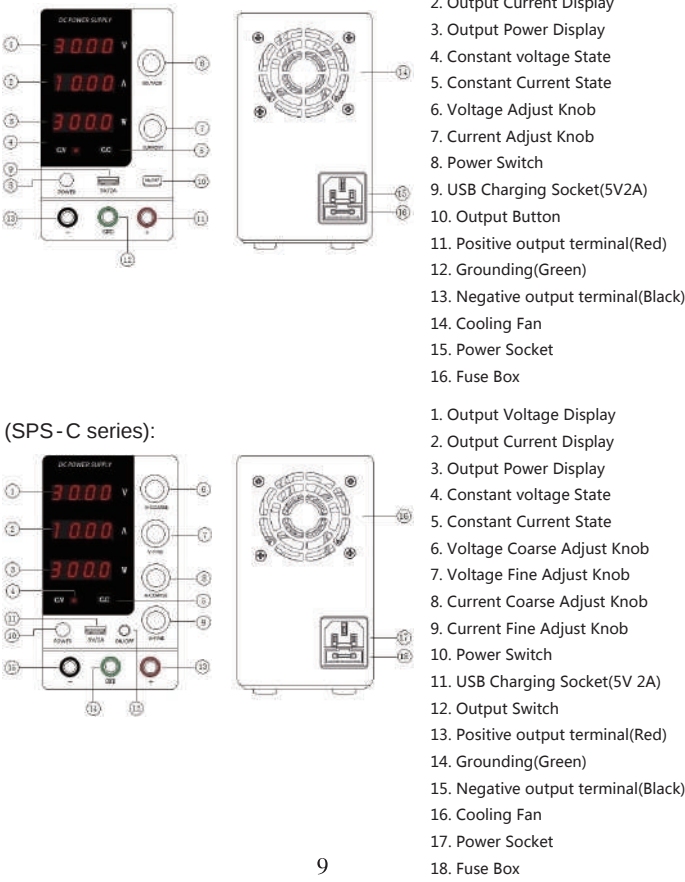


1. Output Voltage Display
  2. Output Current Display
  3. Output Power Display
  4. Constant voltage State
  5. Constant Current State
  6. Voltage Adjust Knob
  7. Current Adjust Knob
  8. Power Switch
  9. USB Charging Socket(5V2A)
  10. Output Button
  11. Positive output terminal(Red)
  12. Grounding(Green)
  13. Negative output terminal(Black)
  14. Cooling Fan
  15. Power Socket
  16. Fuse Box
- (SPS-C series):
1. Output Voltage Display
  2. Output Current Display
  3. Output Power Display
  4. Constant voltage State
  5. Constant Current State
  6. Voltage Coarse Adjust Knob
  7. Voltage Fine Adjust Knob
  8. Current Coarse Adjust Knob
  9. Current Fine Adjust Knob
  10. Power Switch
  11. USB Charging Socket(5V 2A)
  12. Output Switch
  13. Positive output terminal(Red)
  14. Grounding(Green)
  15. Negative output terminal(Black)
  16. Cooling Fan
  17. Power Socket
  18. Fuse Box

9

WORK REQUIREMENT

1. AC input: Please make sure the input voltage of this product 230V±10% 50Hz 115 V±10% 60Hz
2. Do not use in an environment where the ambient temperature exceeds 40 degrees Celsius. The cooling fan is located at the rear of the device and should have enough space for cooling.



OPERATION INSTRUCTION


There are two types of power output modes: constant voltage output (CV) and constant current output (CC). The output mode is determined by the voltage and current values set by the user and the load connected by the user. The output voltage or current value of the power supply won't exceed the voltage and current values set by the user. In constant voltage mode, the output voltage value is equal to the user-set voltage value. In constant current mode, the output current value is equal to the user-set current value.

For example: the voltage value is set to 5V and the current value is set to 5A.

- Steps
- the voltage value is set to 5A
1. Turn on the power switch
  2. Adjust the voltage adjustment knob to 5V


- the current value is set to 5A
1. Press Output Button to the OFF state ,then adjust the current to 5A;
  2. Press Output Button to the ON state,Connect Load to use.

10

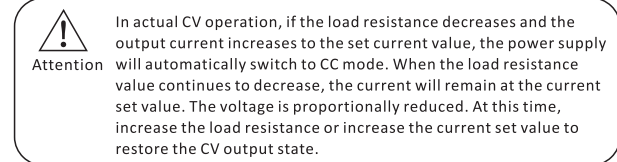

CONNECT THE LOAD

1. Rotate the terminal knob by turning it counterclockwise
2. Insert the load terminal
3. Turn the terminal knob clockwise
4. Banana plug can be directly inserted into the terminal hole

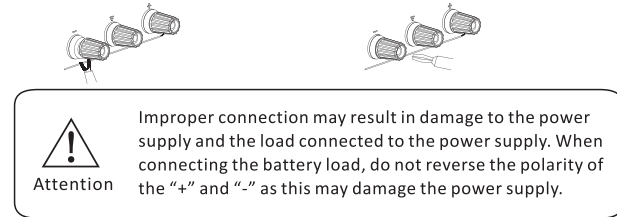

CONSTANT VOLTAGE / CONSTANT CURRENT CHARACTERISTICS

The working characteristics of this series of power supplies are constant voltage/constant current automatic conversion type, which can automatically change between constant voltage and constant current states with load changes. The intersection between constant voltage and constant current mode is called conversion point.For example, if the load causes the power supply to operate in a constant voltage mode, a constant voltage is output. As the load increases, the output voltage will remain constant and the output current will increase. When the current value reaches the set current limit value, the power supply will



11

automatically switch to constant current mode. The output current remains stable and the output voltage decreases proportionally as the load increases further. The conversion of constant voltage and constant current is indicated by the LED on the front panel.

CV indicator light is on during constant voltage, CC indicator is on when constant current.

FUSE REPLACEMENT

If the fuse blows, the power supply will stop working. To find and correct the cause of the blown fuse, then replace it with a fuse of the same specification.

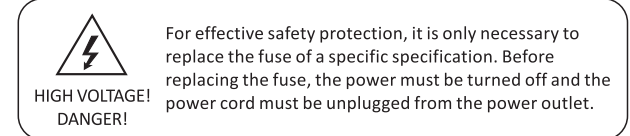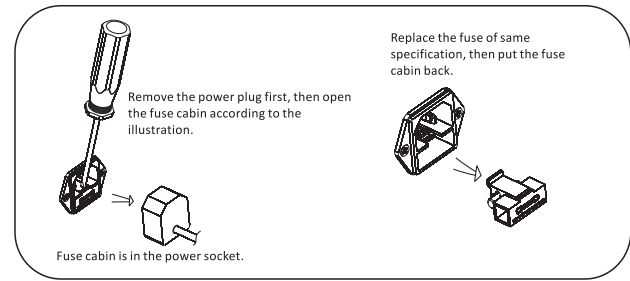

12

PRODUCT MAINTANCE

1. Disconnect the power when the product is not in use.
2. Unplug the power supply before cleaning.
3. Do not use hydrocarbons, chlorides or similar solvents, or use abrasive cleaners.

PRODUCT WARRANTY

1. This product is offered free maintenance service within one year from the date of purchase. Except in the following cases:  
A: Lack of this product warranty card  
B: Failures caused by improper use, such as improper handling and improper repair, modification or adjustment of the device.  
C: Consumable materials are not covered by the warranty.  
D: Naturally irresistible disasters such as floods, fires, earthquakes, etc.

2. Maintenance costs are charged for repairs that exceed the warranty period, and the costs incurred for maintenance are the responsibility of the user.

PACKING LIST

1. 1x Power Supply
2. 1x Power Cord
3. 1x Output Load Cord
4. 1x User's Manual
5. 1x Warranty Card

13