


# OTDR Test Report

File : FirstFiber_3m.sor	File Date : 2020-10-28 19:17:29	Task :
Cable :	Start Postion :	User :
Fiber :	End Postion :	Device Name : OTDR-2101
Operator :	Fiber Type : Singlemode	
Wave : 1550 nm	Range : 500 m	Pulse : 5 ns
Test Mode : Average-Test	Average Times : 5	Ior : 1.46800
End Threshold : 3.00	Non-Reflection Threshold : 0.20	Reflection Threshold : 40.00

Test Trace

X:50m/Div, Y:10.0dB/Div

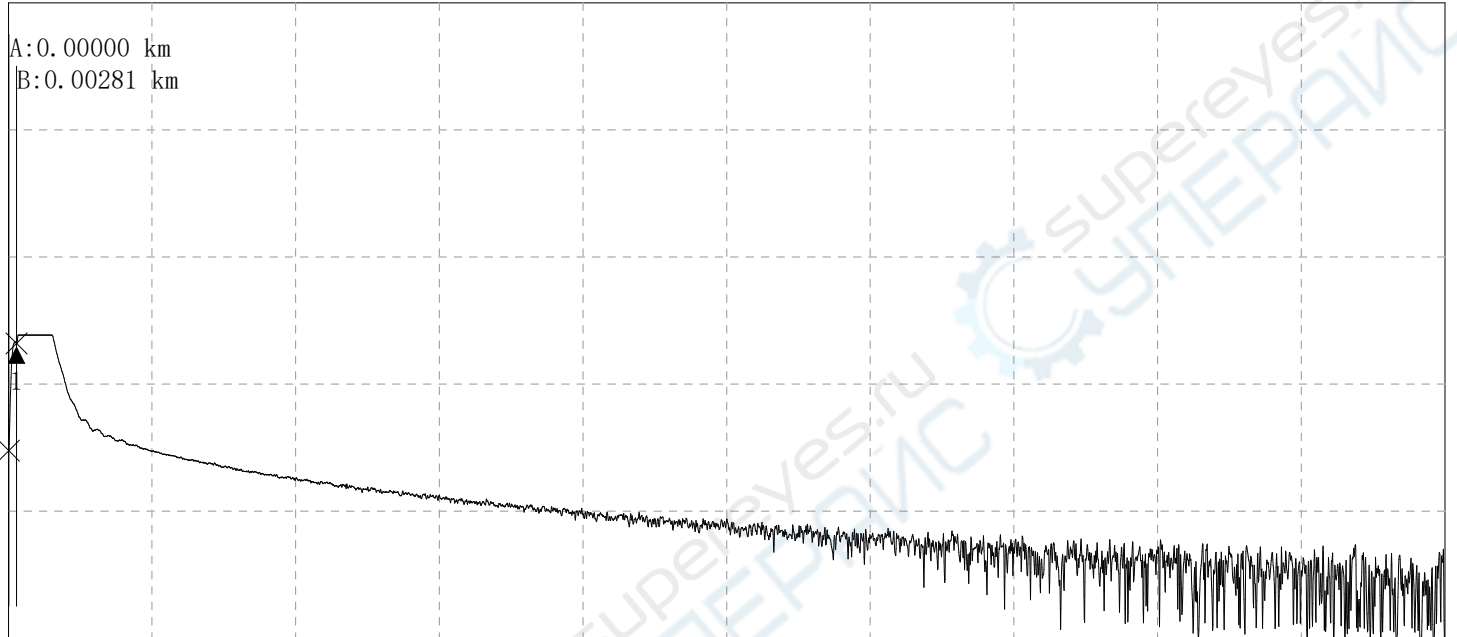

A-B Segment Information

Distance (A-B) :	0.00281 km
Loss (A-B) :	0.011 dB
A-B Average Loss:	3.917 dB/km
LSA Average Loss:	-0.119 dB/km
A-B Return Loss:	55.925 dB

A/B Points Information

A Postion:	0.00000 km
B Postion:	0.00281 km
A Power:	23.195 dBm
B Power:	23.184 dBm
----	----

Fiber Link Information

Number: 1      Link Length: 0.0028 km      Total Loss: 0.001 dB      Average Loss: 0.181 dB/km

Event Table

No	Type	Dis (km)	Aver. -L (dB/km)	Event-L (dB)	Return-L (dB)	Link-L (dB)
1	Reflect	0.0028	0.181	----	73.310	0.001