



DC POWER SUPPLY

- High stability output
- Overall output Anti-burn protection
- Voltage and Current adjustable
- Constant Voltage/Constant Current auto switching
- Continuous adjustable output
- mA automatically conversion output below 5A
- Optional input Voltage:110V/220V

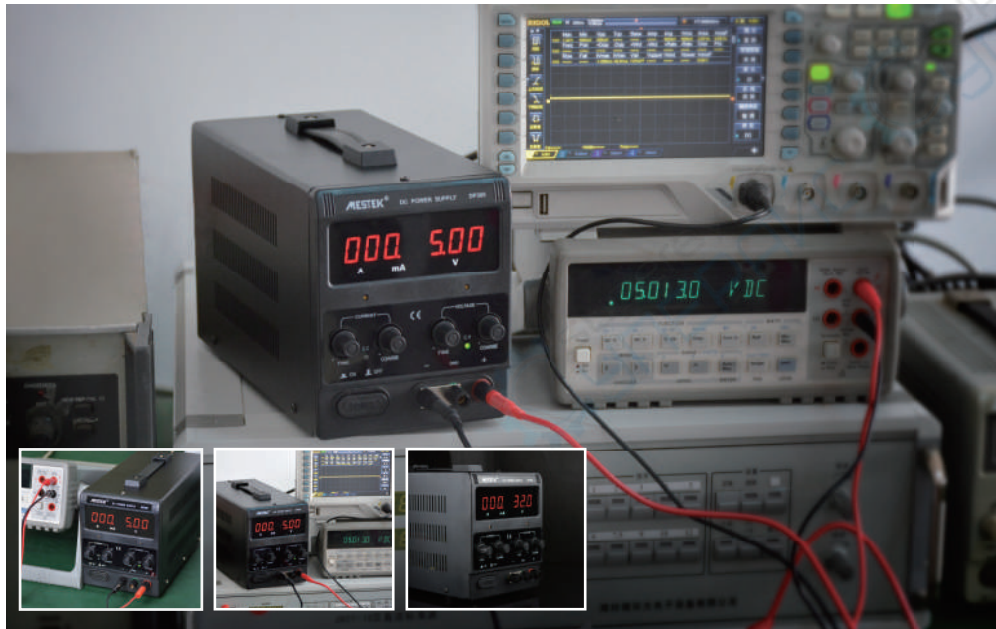

SPECIFICATIONS

Model	DP152(Linear)	DP155	DP305	DP310
Basic Function	Range			
Rated Power	30W	75W	150W	300W
Output Voltage	0~15V	0~15V	0~30V	0~30V
Output Current	0-2.00A	0-5.00A	0-5.00A	0-10.00A
Input Voltage	220V ±10%			
Input Frequency	50Hz/60Hz			
Working Method	Constant Voltage, Constant Current auto switch			
Constant Voltage Indication	Green			
Constant Current Indication	Red			
Display Resolution	Three-digit display: Voltage 0.1V , Current 0.1A mA automatically display: 0-999mA (Below 5A)			
Display Accuracy	±1% ±1 word			
Power effect	CV ≤ 0.05%+1mV CC ≤ 0.05%+1mA			
Load effect	CV ≤ 0.1%+5mV CC ≤ 0.1%+10mA			
Ripple and noise	CV ≤ 10mV RMS CC ≤ 20mA RMS			
Protection	Over Voltage , Over heating , Short Circuit Limit Current Protection			
Cooling method	Intelligent Temperature control fan control cooling			
Size for Product	180*125*160(mm)	260*125*160(mm)	260*125*160(mm)	260*125*160(mm)
Size for Color Box	260*170*200(mm)			
Weight	About 2.5Kg			
Standard Accessories	DC Power Supply - Crocodile clip line-Power Cable-User Manual-Color Box			
Tips:When applying this specification, please be sure the product has been power on for 10 minutesT				