

OBD II Bluetooth Scanner ELM327

—Powered by NEXPEAK

Quick Start Guides

Thanks for choosing our Powerful OBDII Bluetooth Diagnostic Adapter V1.5. Please read this manual carefully before any operating. This manual guides the users how to use bluetooth Diagnostic Scanner step by step.

1. Connection mode



2. Set up Guides

A. Software preparation.

You may download the program by scanning below QR code.



Link: <http://pc.cd/OhC7>

B. Turn on the ignition fully with engine running.

Plug in the ELM327 into your car 16pin OBDII diagnostic Port. You should see the red light blink, if not, press the button ON

* the 16 pin OBDI port usually can be found as below picture shows



C. Enable your cell-phone's bluetooth function.

You will see the bluetooth device available and named as "OBDII". Pair it with default pin code "1234" / "0000"

D. LAUNCH the "TORQUE" program.

Find the "Adpater status" --- "Settings"




Adapter Status Information

Settings

Select "Connection Type " as "Bluetooth"

Select "Choose Bluetooth Device" as "OBDII "

Then exit the program.

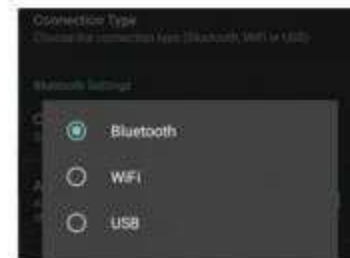

E. Re-run the TORQUE program. wait for 10s around.

you should see the connection will be built

