


PIN SIDE VIEW

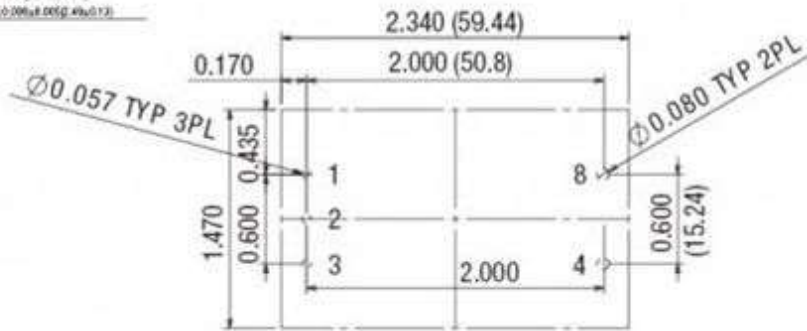


RECOMMEND PCB FOOTPRINT

- NOTES:  
 UNLESS OTHERWISE SPECIFIED:  
 1. M3 SCREW USED TO BOLT UNIT'S BASEPLATE TO OTHER SURFACES (SUCH AS HEATSINK)  
 MUST NOT EXCEED 0.098" (2.5mm) DEPTH BELOW THE SURFACE OF BASEPLATE  
 2. APPLIED TORQUE PER SCREW SHOULD NOT EXCEED 5.3in-lb (0.6Nm);  
 3. ALL DIMENSIONS ARE IN INCHES (MILLIMETER);  
 4. ALL TOLERANCES:  $\times . \times \times \text{in} \pm 0.02 \text{in} (\times . \times \times \text{mm} \pm 0.5 \text{mm})$   
 $\times . \times \times \times \text{in} \pm 0.01 \text{in} (\times . \times \times \times \text{mm} \pm 0.25 \text{mm})$   
 5. COMPONENTS WILL VARY BETWEEN MODELS  
 6. STANDARD PIN LENGTH: 0.180 Inch  
 FOR L2 PIN LENGTH OPTION IN MODEL NAME, SEE PART NUMBER STRUCTURE.

INPUT/OUTPUT CONNECTIONS	
Pin	Function
1	+Vin
2	Remote On/Off
3	-Vin
4	-Vout
8	+Vout

Dimensions are in inches (mm shown for ref. only).



Tolerances (unless otherwise specified):  
 $\text{XX} \pm 0.02 (0.5)$