

EPS Series Plastic Case Slim Waterproof



20W~150W 12V/24V

Model Specifications



Size: 164×20×19mm
Power: 20W
Input: 220V±15%

Model No.	Output Voltage	Output Current
EPS-12E20	12VDC	1.66A
EPS-24E20	24VDC	0.83A



Size: 204×20×19mm
Power: 30W
Input: 220V±15%

Model No.	Output Voltage	Output Current
EPS-12E30	12VDC	2.50A
EPS-24E30	24VDC	1.25A



Size: 236×20×19mm
Power: 40W
Input: 220V±15%

Model No.	Output Voltage	Output Current
EPS-12E40	12VDC	3.33A
EPS-24E40	24VDC	1.66A



Size: 149×48×32mm
Power: 60W
Input: 220V±15%

Model No.	Output Voltage	Output Current
EPS-12E60	12VDC	5.00A
EPS-24E60	24VDC	2.50A



Size: 196×48×32mm
Power: 100W
Input: 220V±15%

Model No.	Output Voltage	Output Current
EPS-12E100	12VDC	8.33A
EPS-24E100	24VDC	4.16A



Size: 256×48×32mm
Power: 150W
Input: 220V±15%

Model No.	Output Voltage	Output Current
EPS-12E150	12VDC	12.5A
EPS-24E150	24VDC	6.25A

Please refer to www.hyrite.com for detailed specs.



Features

- Slimline design.
- Fully sealed with plastic housing IP67.
- No ground connection.

Applications

LED module, strip, perforating lamp, pixel lamp, light bar, light box, wall washer, panel light, etc...
Specially for application with narrow space, such as cove light, light box, channel letter...

Derating Curve

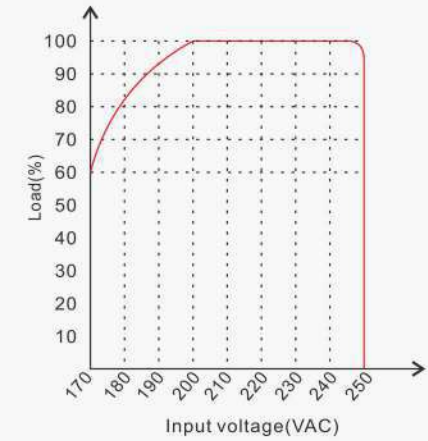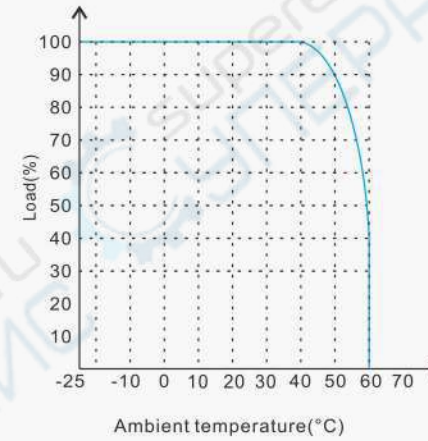

Wiring Diagram

