



LHDV Series Rainproof



200W~400W

5V/12V/24V

Model Specifications **CE**



Size: 185.5×112.5×56.5mm  
Power: 200W  
Input: 220V±15%

Model No.	Output Voltage	Output Current
LHDV-5E200	5VDC	40.0A
LHDV-12E200	12VDC	16.7A
LHDV-24E200	24VDC	8.3A



Size: 185.5×112.5×56.5mm  
Power: 250W  
Input: 220V±15%

Model No.	Output Voltage	Output Current
LHDV-5E250	5VDC	50.0A
LHDV-12E250	12VDC	20.8A
LHDV-24E250	24VDC	10.4A



Size: 185.5×112.5×56.5mm  
Power: 300W  
Input: 220V±15%

Model No.	Output Voltage	Output Current
LHDV-5E300	5VDC	60.0A
LHDV-12E300	12VDC	25.0A
LHDV-24E300	24VDC	12.5A



Size: 185.5×112.5×56.5mm  
Power: 350W  
Input: 220V±15%

Model No.	Output Voltage	Output Current
LHDV-12E350	12VDC	29.2A
LHDV-24E350	24VDC	14.6A



Size: 185.5×112.5×56.5mm  
Power: 400W  
Input: 220V±15%

Model No.	Output Voltage	Output Current
LHDV-12E400	12VDC	33.3A
LHDV-24E400	24VDC	16.7A

## ■ Features

Safety design with separated line input power cord and low voltage output terminals, preventing electrical shock.



Operating temperature: - 25°C ~ 55°C

Relative humidity: 5% - 95%


## ■ Applications

LED module, strip, perforating lamp, pixel lamp, light bar, light box, wall washer, panel light, etc...

## ■ Derating Curve

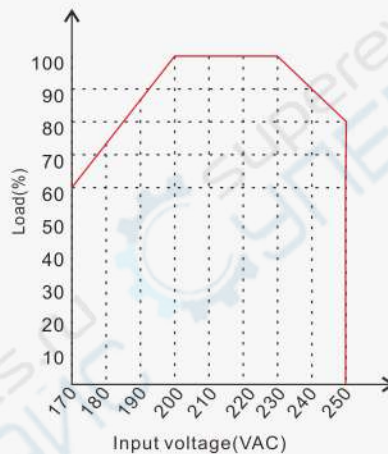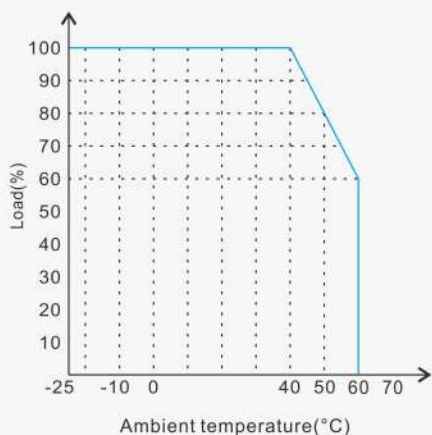

## ■ Wiring Diagram

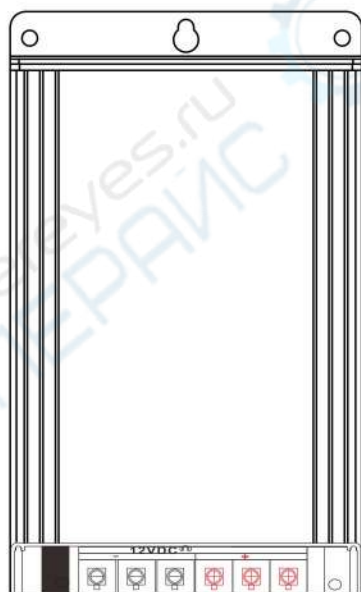

**CAUTION**  
The product **MUST** be installed vertically and the wiring terminals downwards.

