

RLDV-C Series Rainproof



60W~600W

5V/12V/24V

Model Specifications



Size: 135×64×42mm
Power: 60W
Input: 220V±15%

Model No.	Output Voltage	Output Current
RLDV-12E60C	12VDC	5.0A
RLDV-24E60C	24VDC	2.5A



Size: 152×80×42mm
Power: 100W
Input: 220V±15%

Model No.	Output Voltage	Output Current
RLDV-12E100C	12VDC	8.3A
RLDV-24E100C	24VDC	4.17A



Size: 182×90×52mm
Power: 150W
Input: 220V±15%

Model No.	Output Voltage	Output Current
RLDV-12E150C	12VDC	12.5A
RLDV-24E150C	24VDC	6.25A



Size: 197×140×66mm
Power: 200W
Input: 220V±15%

Model No.	Output Voltage	Output Current
RLDV-5E200C	5VDC	40.0A
RLDV-12E200C	12VDC	16.7A
RLDV-24E200C	24VDC	8.33A



Size: 197×140×66mm
Power: 300W
Input: 220V±15%

Model No.	Output Voltage	Output Current
RLDV-5E300C	5VDC	60.0A
RLDV-12E300C	12VDC	25.0A
RLDV-24E300C	24VDC	12.5A



Size: 197×140×66mm
Power: 400W
Input: 220V±15%

Model No.	Output Voltage	Output Current
RLDV-12E400C	12VDC	33.3A
RLDV-24E400C	24VDC	16.7A



Size: 197×140×66mm
Power: 500W
Input: 220V±15%

Model No.	Output Voltage	Output Current
RLDV-12E500C	12VDC	41.7A
RLDV-24E500C	24VDC	20.8A



Size: 234×140×66mm
Power: 400/600W
Input: 220V±15%

Model No.	Output Voltage	Output Current
RLDV-5E400C	5VDC	80.0A
RLDV-12E600C	12VDC	50.0A
RLDV-24E600C	24VDC	25.0A

Please refer to www.hyrite.com for detailed specs.

■ Features

Aluminum housing with ventilating fan.

Safety design with separated line input power cord and low voltage output terminals, preventing electrical shock.



Operating temperature: - 25°C ~ 55°C

Relative humidity: 5% - 95%

■ Applications

LED module, strip, perforating lamp, pixel lamp, light bar, light box, wall washer, panel light, etc...

■ Derating Curve

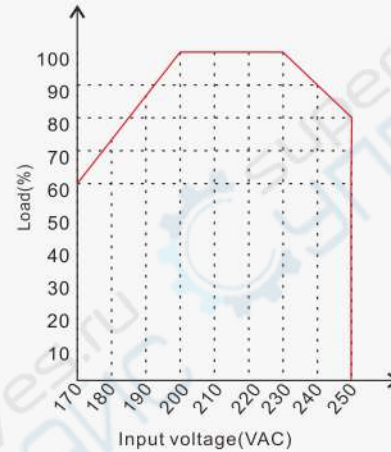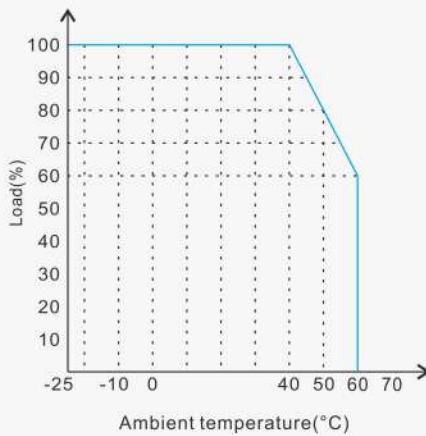

■ Wiring Diagram

