OPTO-EDU

WF10X/18
10/0.25
160/0.17
40/0.65
160/0.17

WF10X/18
WF10X/18
15

10/0.25
160/0.17
40/0.65
160/0.17
WF10x-18mm, Eyepiece Is Anti-fungal
Anti-fungal System Built In Head

Head

WF10x-18mm, Eyepiece Is Anti-fungal, Anti-fungal System Built In Head

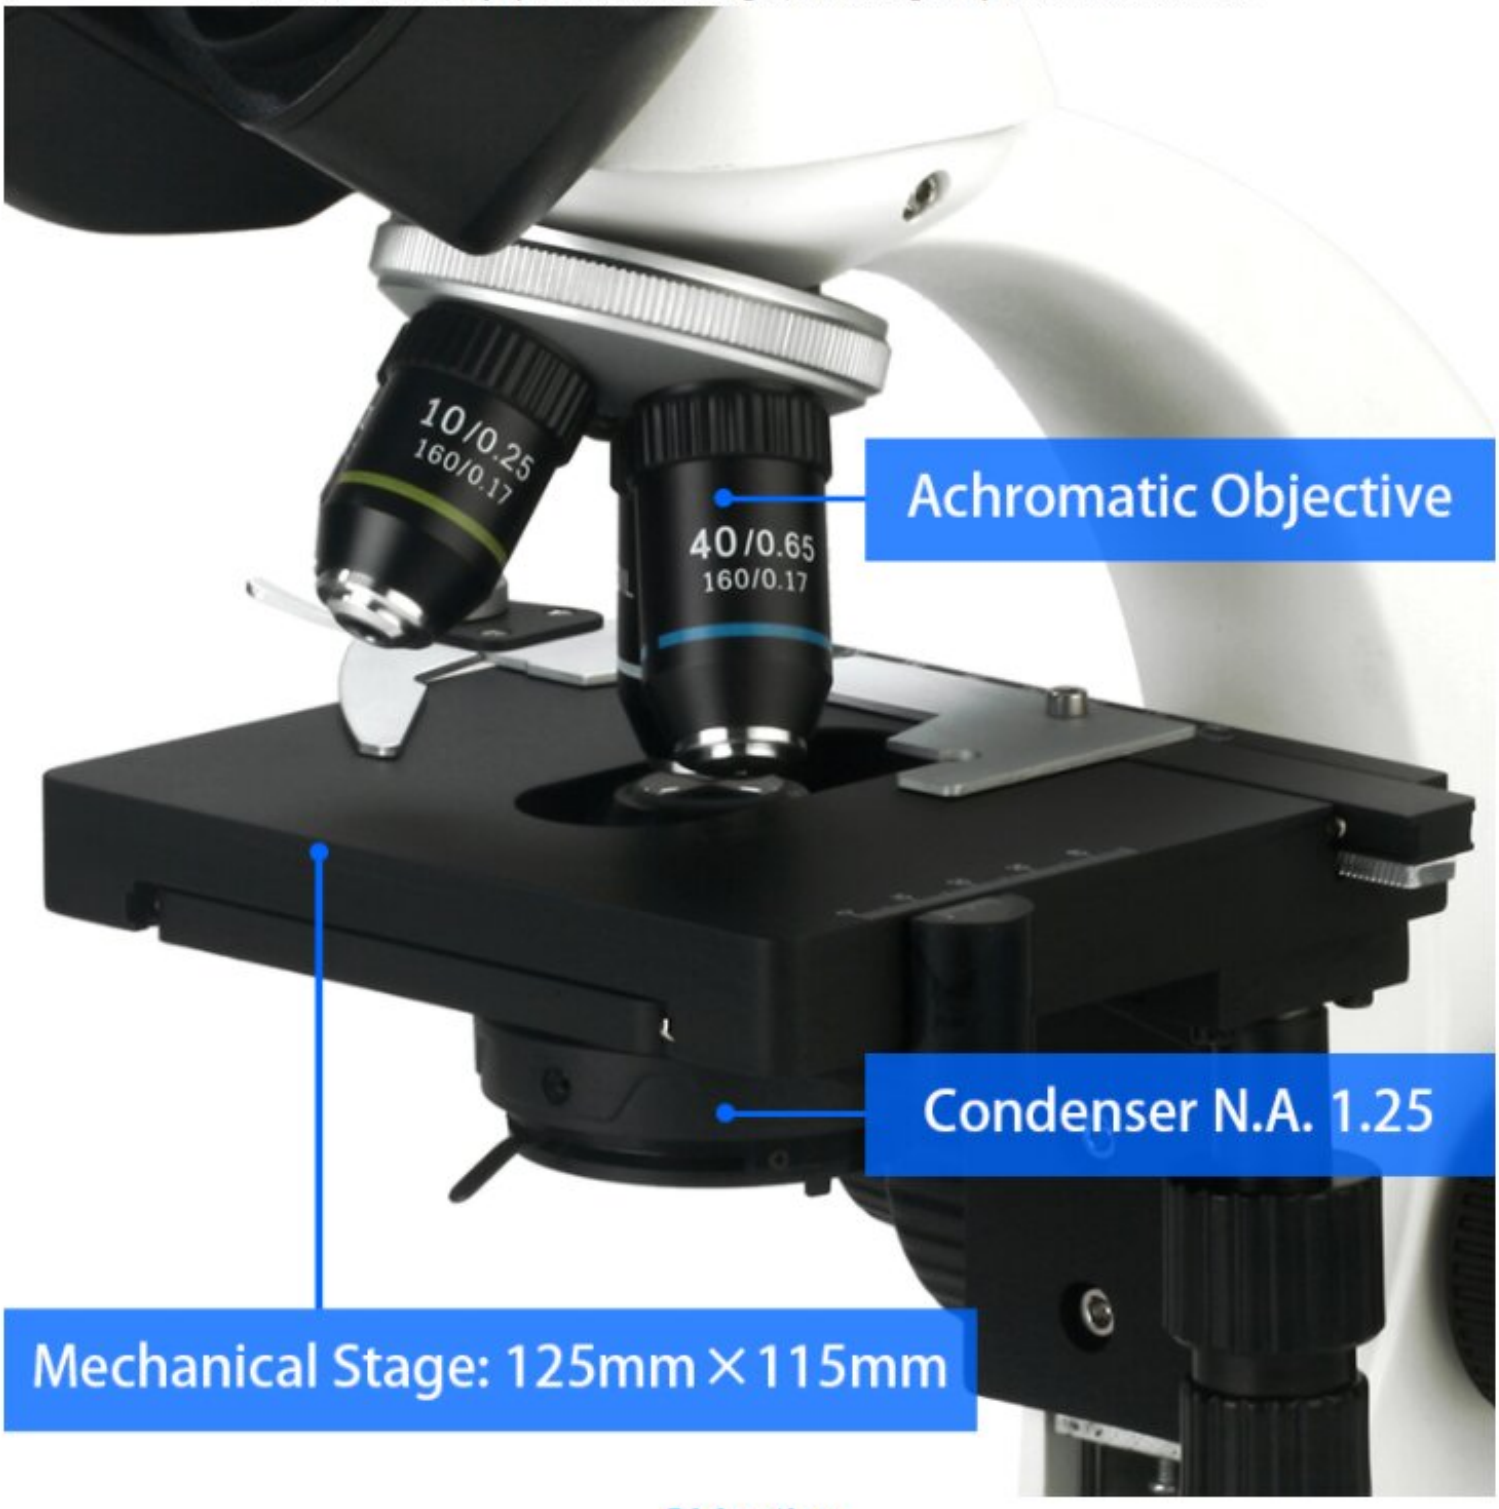

Objective

Achromatic Objective: 4x, 10x, 40x(s), 100x/1.25(oil)(s), Objective Is Anti-fungal

Working Stage

Mechanical Stage, Stage Size:125mm×115mm,Travel: 35mm×75mm

Abbe Condenser

N.A. 1.25, Adjustable Aperture, Aperture Center Is Adjustable, Built In Blue Filer, ф38.5mm

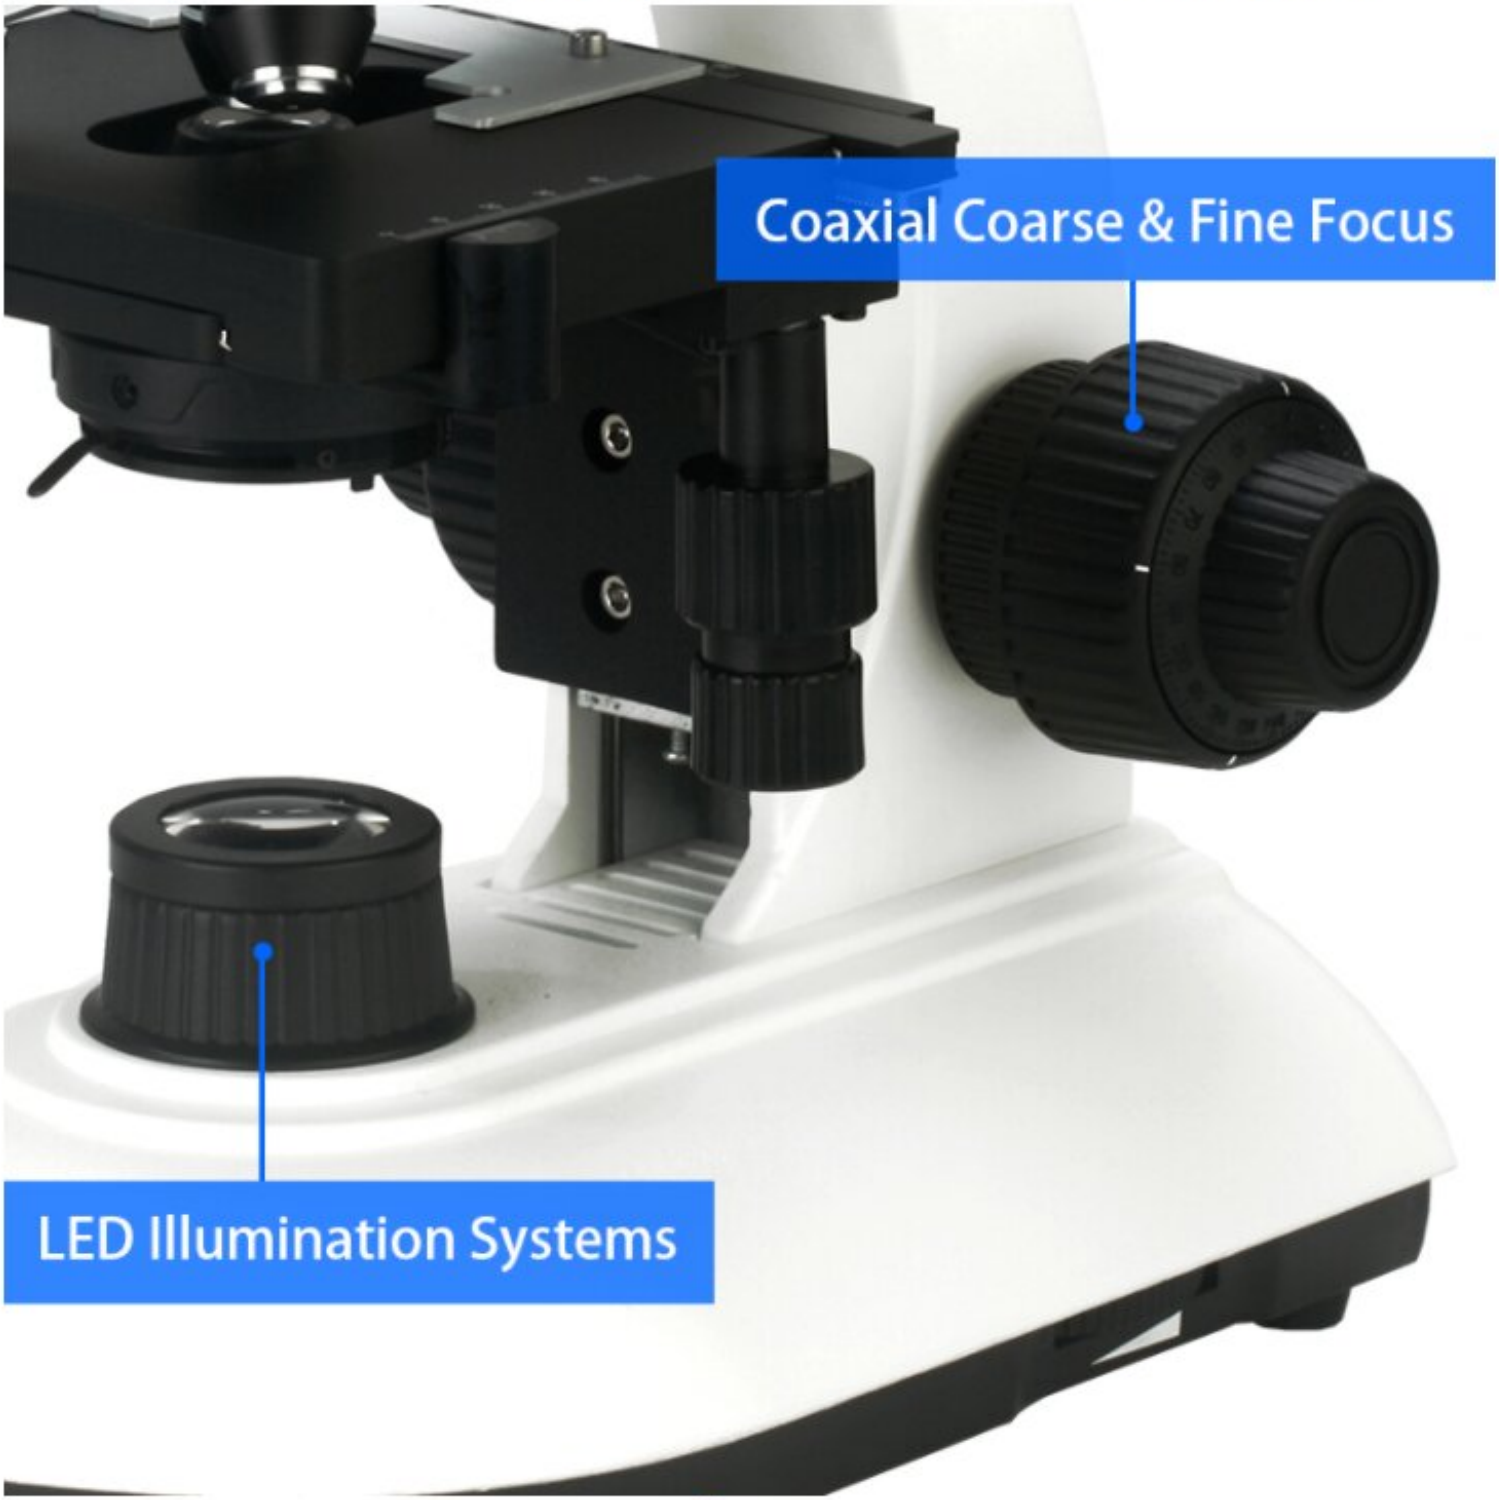

Focus

Coaxial Coarse & Fine Focus, Stage Moving Knob Can Move Stage Turn Left Or Right

Light Source

LED Illumination Systems (Non-rechargeable), Rotation Potentiometer With Power Switch

WF10X
WF10X

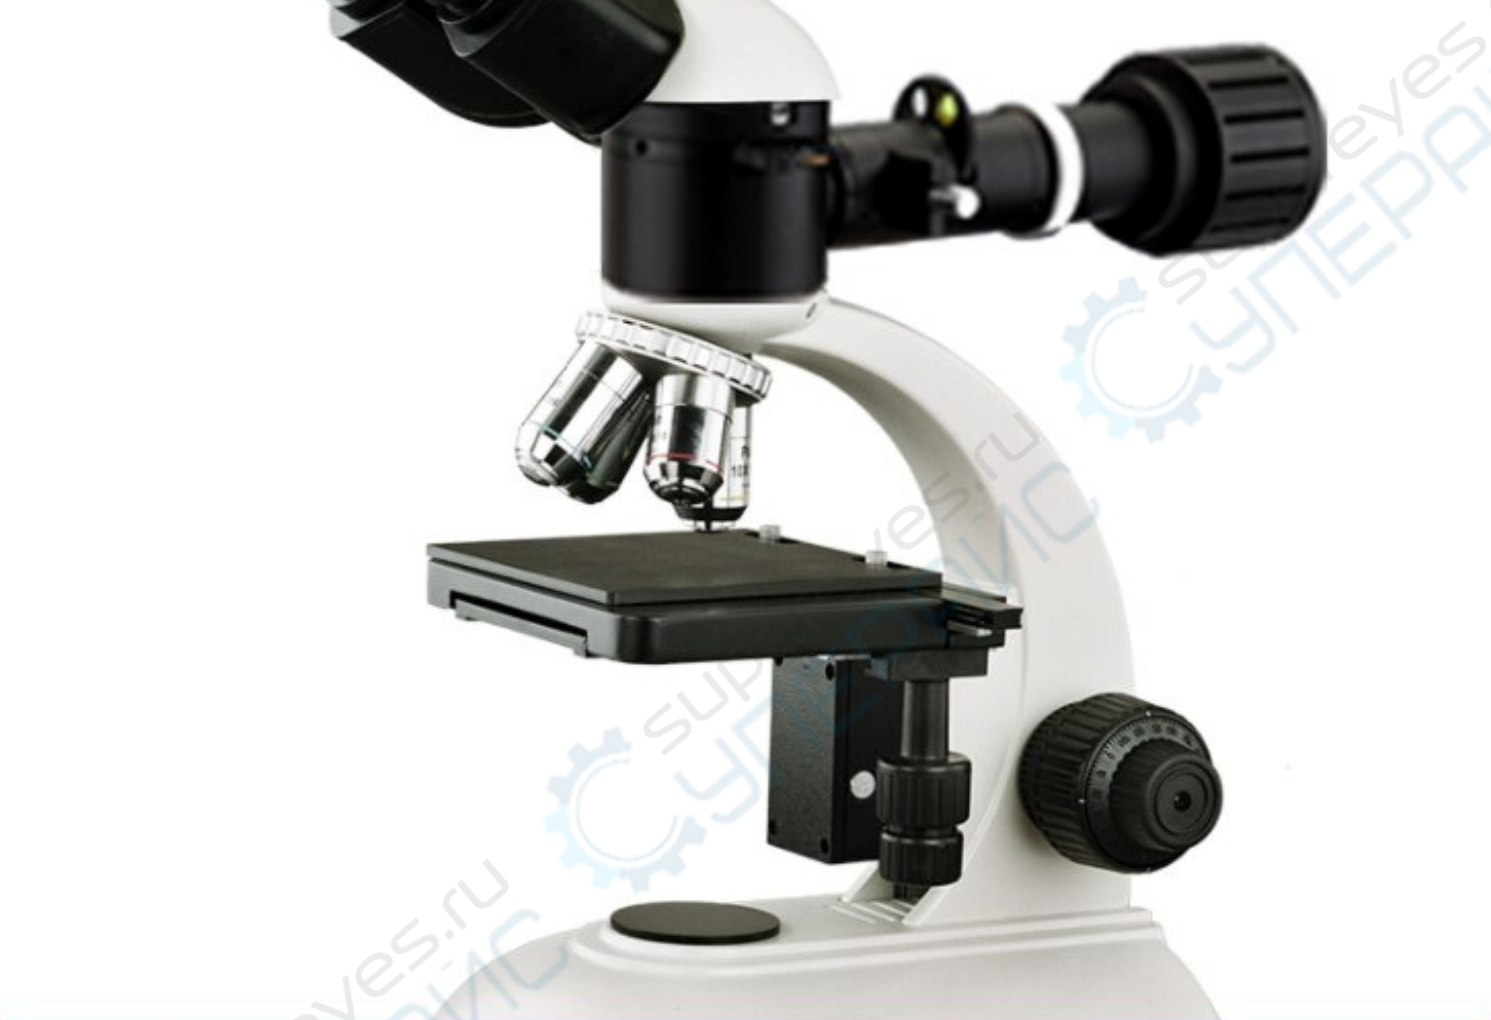

A11.2601 Student Biological Microscope Upgrade To A13.2603 Metallurgical Microscope

A11.2601 Student Biological Microscope Upgrade To**A13.2603 Metallurgical Microscope**

A13.2603 Metallographic microscopes are often used to observe opaque objects such as wafers

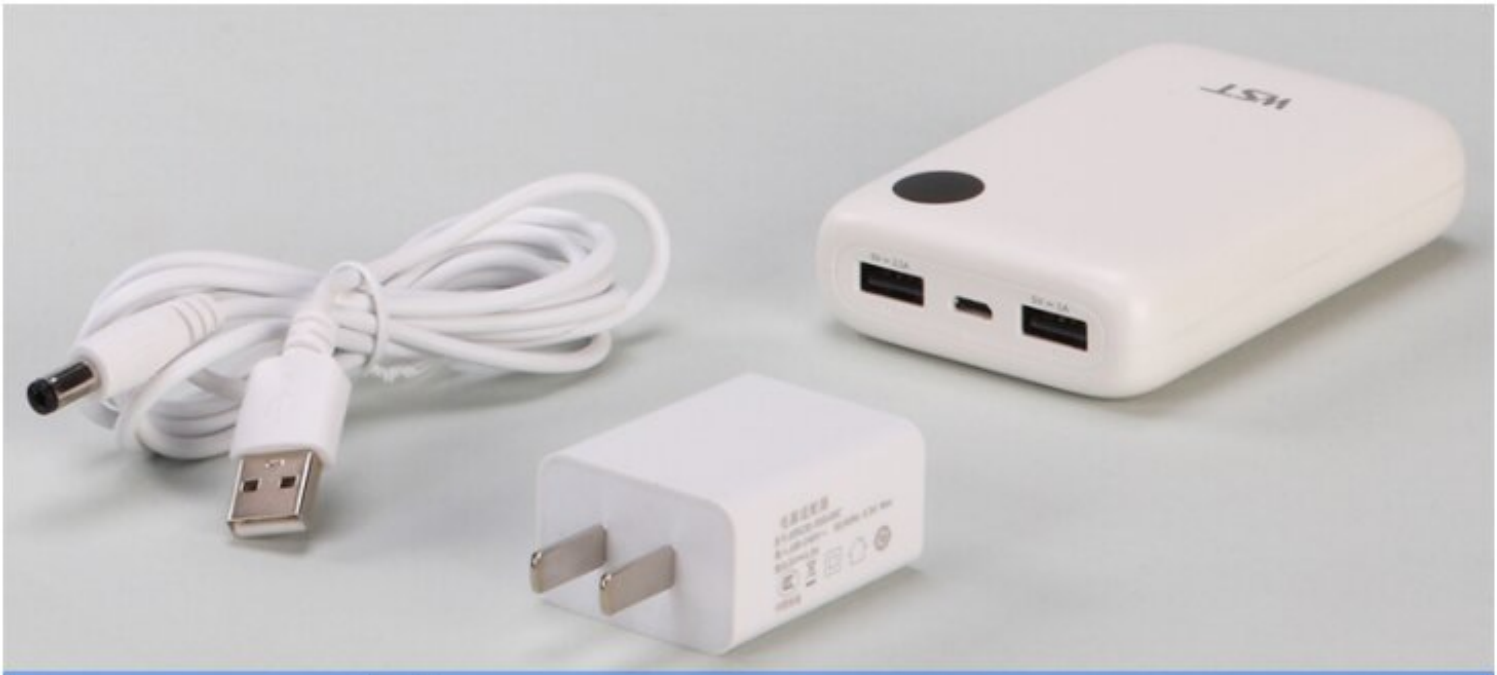

supereyes.ru
СУПЕРАЙС

Powered By Safety Low Voltage Charger, Input Wide Voltage 100V-240V, Output 5V1A, Support Power Bank Supply For Outdoor Use

Powered By Safety Low Voltage Charger

Input Wide Voltage 100V-240V, Output 5V1A, Support Power Bank Supply For Outdoor Use

Items	A11.2601 Student Biological Microscope Specification	-M	-B	-T	-BP	-TP	Cata. No.
Head	Monocular Head Inclined 30°, Rotatable 360°	•					A53.2601-M
	Seidentopf Binocular Head Inclined 30°, Rotatable 360°, Interpupilary Distance 48-75mm		•		•		A53.2601-B
	Seidentopf Trinocular Head Inclined 30°,Rotatable 360°, Interpupilary Distance 48-75mm, Light Split Fixed P20/E80			•		•	A53.2601-T
Eyepiece	WF10x/18mm	•	••	••	••	••	A51.2602-1018
	WF16x/13mm	=	=	=	=	=	A51.2602-1613
	WF10x/18mm With Pionter	=	=	=	=	=	A51.2604-1018
	WF10x/18mm, With Micrometer X-0.1mm*180 Div / Y-Single Line	=	=	=	=	=	A51.2605-1018
	WF10x/18mm With Micrometer X-0.1mm*180 Div / Y-Single Line, Diopter Adjustable	=	=	=	=	=	A51.2605-1018D
Nosepiece	Quadruple, Backward	•	•	•	•	•	A54.2610-N03
Achromatic Objective	4x/0.1, W.D.=18.6mm	•	•	•			A52.2601-4
	10x/0.25, W.D.=6.5mm	•	•	•			A52.2601-10
	20x/0.40, W.D.=1.75mm	=	=	=			A52.2601-20
	40x/0.6(S), W.D.=0.47mm	•	•	•			A52.2601-40
	60x/0.80(S), W.D.=0.10mm	=	=	=			A52.2601-60
	100x/1.25(S,O), W.D.=0.07mm	•	•	•			A52.2601-100

Plan Objective	4x/0.1, W.D.=14.5mm				●	●	A52.2603-4
	10x/0.25, W.D.=5.65mm				●	●	A52.2603-10
	20x/0.40, W.D.=5.65mm				○	○	A52.2603-20
	40x/0.6(S), W.D.=0.85mm				●	●	A52.2603-40
	100x/1.25(S,O), W.D.=0.07mm				●	●	A52.2603-100
Stage	Double Layer Mechanical Size 125×115mm, Travel Range 35×75mm	●	●	●	●	●	A54.2601-S03
Condenser	Abbe N.A. 1.25(Iris Diaphragm)	●	●	●	●	●	A56.2614-09
Focusing	Coaxial Coarse And Fine Focusing Knobs, Travel Range: 22mm, Scale: 2μm	●	●	●	●	●	
C-mount	1.0x (Focus Adjustable)			○		○	A55.2601-B10
	0.5x (Focus Adjustable)			○		○	A55.2601-B05
Light Source	3W LED Illumination, Powered By Safety Low Voltage Charger, Input Wide Voltage 100V-240V, Output 5V1A, Support Power Bank Supply For Outdoor Use	●	●	●	●	●	A56.2613-3W
	3W LED Illumination (Rechargeable), Powered By Safety Low Voltage Charger, Input Wide Voltage 100V-240V, Output 5V1A, Support Power Bank Supply For Outdoor Use	○	○	○	○	○	A56.2651-3WR
	12V 20W Halogen Lamp, Wide Voltage: 100V-240V	○	○	○	○	○	A56.2650-20W
	Plano-Concave Mirror	○	○	○	○	○	A56.2601-B
Dark Field	Dark Field Ring, For 4x~40x Objective	○	○	○	○	○	A5D.2611-B
Polarizing	Analyzer + Polarizer Set	○	○	○	○	○	A5P.2601-B
Package	Carton Size 337*242*417mm, 1 Unit/Ctn						
Weight	Gross Weight 7.0kgs, Net Weigth 5.5kgs						

Note:"●"In Table Is Standard outfits,"○"Is Optional Accessories.

Product Models

A11.2601-M **A11.2601-B, BP** **A11.2601-T, TP**

Product Accessories



A5D.2611-B
Dark Field Ring



A56.2601-B
Plano-concave Mirror



A5P.2601-B
Analyzer / Polarizer



A55.2601-B05
0.5x C-Mount（Focus Adjustable）



A55.2601-B10
1x C-Mount（Focus Adjustable）