



DC POWER SUPPLY

- Optional Module(Sense Compensate Output/USB/485/232)
- Display Voltage/Current/Resistance/Power simultaneously
- High Power output, four-digit display
- Overall output protection
- Continuous Adjustable output
- Constant Voltage/Constant Current auto switching
- Step adjustment, coding switch
- One-button output switch
- Output Port for Front and Back
- Optional Voltage:110V/220V

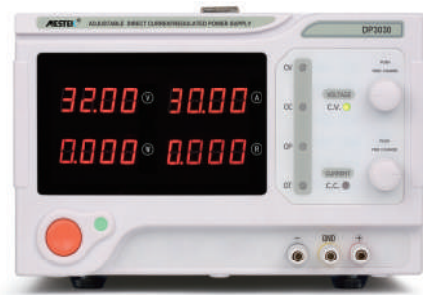

SPECIFICATIONS

Model	DP3020	DP3030	DP6010	DP6020	DP2050
Basic Function	Range				
Output Voltage	0-30V	0-30V	0-60V	0-60V	0-20V
Output Current	0-20A	0-30A	0-10A	0-20A	0-50A
Output Power	600W	900W	600W	1200W	1000W
Display Resolution					
Voltage Resolution	<100V:10mV ≥ 100V: 0.1V				
Current Resolution	<10A:1mA ≥ 10A: 10mA				
Power Resolution	<10W:1mW ≥ 10W: 10mW ≥ 100W: 0.1W ≥ 1000W: 1W				
Resistance Resolution in Load Equivalent	<10R: 1mR ≥ 10R: 10mR ≥ 100R: 0.1R ≥ 1000R: 1R				
Voltage Accuracy	≤2%				
Current Accuracy	≤0.5%				
Load Accuracy	≤0.5%				
Ripple and noise	≤1% (Valid values)				
Voltage Step Adjustment resolution	0.1V				
Current Step Adjustment resolution	0.1A				
Power Input	AC 220V/110V Optional				
Size for Product	330 (D) * 250 (W) * 155 (H) mm				
Size for Color Box	420 (D) * 310 (W) * 220 (H) mm				
Weight	About 5kg				
Standard Accessories	DC Power Supply-Power Cable-User Manual-Color Box				

Tips:When applying this specification, please be sure the product has been power on for 10 minutes