

KFI-40


Optical Fiber Identifier



Product characteristics

- Suitable for 0.25/0.9/2.0/3.0mm Easy test directly, convenient and efficient.
- Identifies 3 common test tones.
- Small and Practical. No need to replace the chucks.
- Identifies dominant traffic direction, audible alarm.
- Approximate core power reading.
- Low false detection & insertion loss.
- Very easy to operate.
- Battery low indication.

Multi-in-one Chucks

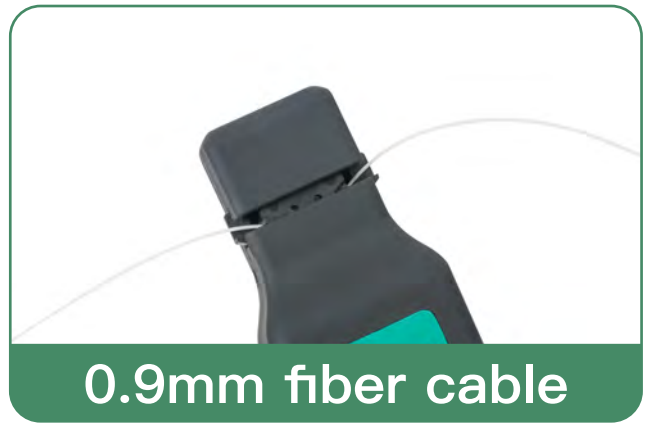

PRODUCT SPECIFICATION:

Type	KFI-40
Identified Wavelength Range	800nm to 1700nm
Identified Signal Type	CW,270 Hz ± 5%,1 kHz ± 5%,2 kHz ± 5%
Detector Type	φ1mm InGaAs 2 pcs
Adapter Type	Universal Holder for φ0.25(Bare Fiber),φ0.9,φ2.0,φ3.0 Cable
Signal Direction	Left & Right LED
Optical Power Reading	-40 dBm to 10 dBm
Signal Frequency	270Hz,1kHz,2kHz
Power Supply	AA*2
Operating Temperature	-10°C to 60°C
Storage Temperature	-25°C to 70°C
Dimension	195mm*10mm*8mm
Weight	235g

PRODUCT LIST:



CONTACT US:

KomShine Technologies Limited

HEAD OFFICE:

2F Building#2 Huashen Technology Park, Yuhua district Nanjing, JS, 210001,
P.R. China

TEL: +86 (025) 66047688

www.komshine.com

ventas@komshine.com

- * Komshine reserves the right to improve, enhance, or modify the features and specifications of KomShine products without prior notification.
- * Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.
- * This catalogue is printed using environmentally friendly paper and ink.